

# IoT Sensor

Mini Mullion, Mullion, Wall Mount, Keypad



## Overview

The IoT Sensor is the most advanced integrated reader and network-enabled sensor at the entryway and beyond. Leveraging industry-leading security, the new sensor platform provides a cost-effective and secure migration path to a touchless environment, exceeds the advanced security requirements of today's dynamic environments and sets organizations up with actionable business intelligence data.

This intelligent edge device allows end users to finally break the constraints and restrictions imposed by legacy access control systems and choose a migration path to low-cost secure credentials based on DESFire EV 2/3 or government-grade credential support. The IoT Sensor is interoperable with over a dozen physical and mobile credential technologies so organizations can use the technology of their choice and easily migrate to the latest solutions as budget and resources allow. The sensor supports NFC, including Apple Pay and Google Pay today. The device is a true multi-channel capable reader.

Safetrust's IoT Sensor is packed with intelligent features, such as mesh network communication between devices that enable enterprise location-based services making it possible to monitor the location of people, objects and other environmental factors. Each sensor includes a multi-directional antenna array enabling a more precise location of users and can distinguish entries from exits and feed that data into your business intelligence platform, regardless of your current PACS.

## How to Order

To place an order for the IoT Sensor, please contact Safetrust at [sales@safetrust.com](mailto:sales@safetrust.com).  
For more information, visit [www.safetrust.com/iot-sensor](http://www.safetrust.com/iot-sensor).



## Key Features

### ✓ Bridging Legacy to Mobile Credentials

Supports 'Bring Your Own Key' (BYOK) so organizations can choose card manufacturers that best suit their design needs and pricing.

### ✓ True Multi-channel Capable Reader

Supports BLE and NFC, including full ApplePay support in enterprise models.

### ✓ Ingress and Egress

Each sensor includes a multi-directional antenna array enabling more precise location of users, and can distinguish entries from exits and report both from a single sensor.

### ✓ Enterprise Location-based Services

Employs a mesh network between devices making it possible to monitor people, objects, and conditions to provide actionable data.

### ✓ Supports Wiegand, OSDP, and F2F


End users can change panels without changing readers. Easily switch between Wiegand, OSDP, and F2F and turn MQTT on or off.

### ✓ For Your Existing and Growing Infrastructure

Breathe new life into your current HID iCLASS® readers with a Safetrust SABRE Module, and add IoT Sensors to new doors as you expand and grow — all managed from one centralized platform.


## Secure Remote Management

Using over-the-air (OTA) management, such as Wi-Fi or BLE, administrators can configure and manage their IoT Sensors. Sensors connected to the Wi-Fi network allow for remote configuration, management and monitoring, eliminating the cost of onsite visits through a centrally managed and connected reader ecosystem. OTA also enables future releases such as product updates, software patches and any evolution of new card specifications to be delivered seamlessly with the click of a button.

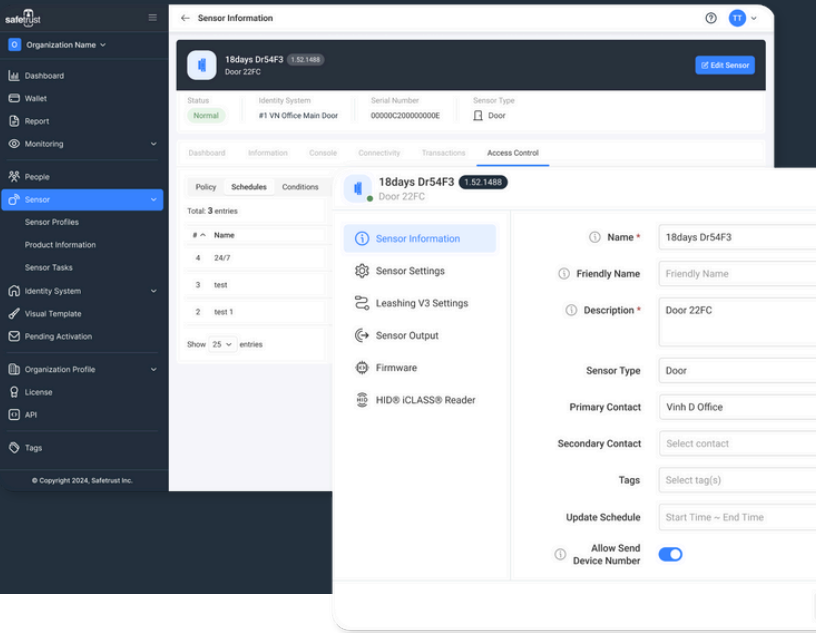

# IoT Sensor

Mini Mullion, Mullion, Wall Mount, Keypad

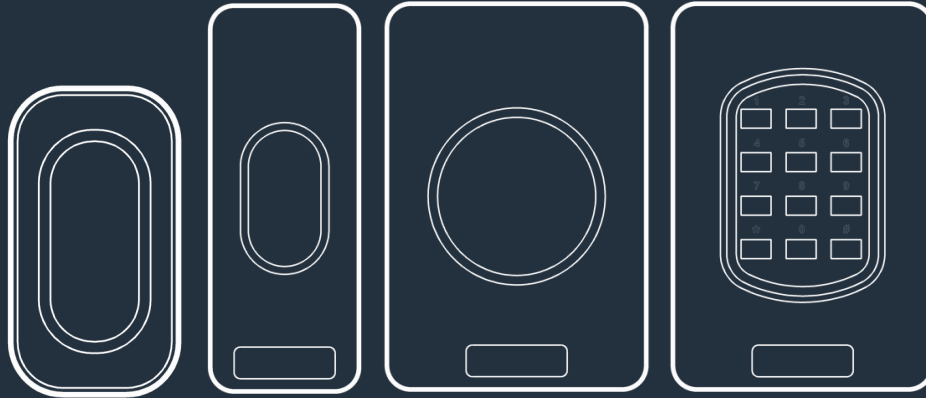

	Mini Mullion	Mullion	Wall Mount	Keypad
<b>Model Number</b>	SA500	SA510	SA520	SA530
<b>Part Number*</b>	8845-000	8845-100	8845-200	8845-300
	<i>*add -H after above part numbers if ordering HF-only version (i.e. 8845-000-H)</i>			
<b>Mounting</b>	Mini Mullion	Mullion	Wall Mount	Wall Mount
<b>Input</b>	Proximity (125kHz), Smartcards (13.56MHz), Bluetooth Low Energy, NFC (Apple Pay) 2.45GHz			
<b>Output</b>	Wiegand, OSDP (RS-485), Wi-Fi, BLE Mesh Network			
<b>Current Consumption (@12V)</b>	110 mA Average 200 mA Peak	110 mA Average 200 mA Peak	110 mA Average 200 mA Peak	130 mA Average 210 mA Peak
<b>Power Supply</b>	12 - 24VDC			
<b>Product Weight</b>	94 g / 3.31 oz +/- 5%	141 g / 4.97 oz +/- 5%	290 g / 10.23 oz +/- 5%	310 g / 10.93 oz +/- 5%
<b>Dimensions</b>	3.9 x 7.4 x 2.3 cm (1.57 x 3.05 x .94 in)	11.8 x 4.3 x 2.8 cm (4.6 x 1.7 x 1.1 in)	11.8 x 7.8 x 2.8 cm (4.6 x 3.1 x 1.1 in)	11.8 x 7.8 x 2.8 cm (4.6 x 3.1 x 1.1 in)
<b>Color</b>	Black			
<b>Operating Temperature</b>	-35...+65°C / -31...+149°F			



<b>Storage Temperature</b>	-35...+85°C / -31...+185°F
<b>Operating Humidity</b>	5% to 95% relative humidity (non-condensing)
<b>Connection</b>	Pigtail Cable
<b>Status Indicator</b>	LED and Buzzer
<b>Configuration &amp; Firmware Updates</b>	Wi-Fi (remote via secure cloud portal) • BLE (onsite, using administrator's mobile device) • OSDP (using PACS)
<b>Cable Distance</b>	Wiegand 152 m / 500 ft (22 AWG wire), RS-485 11219 m / 1000 ft
<b>LF Credential Compatibility (125 KHZ)</b>	HID®, Indala®, Casi Rusco®, AWID®, Farpointe®, & others (*High-frequency only models. Please note, these models do not read low-frequency 125kHz proximity cards.)
<b>HF Credential Compatibility (13.56 MHZ)</b>	MIFARE Classic, DESFire EV3, ISO 15693 CSN, ISO 14443A/B CSN/UID, HID® iCLASS secure read, LEAF
<b>Read Range</b>	High Frequency Java Cards: Up to 4 cm / 1.6" • MIFARE Classic: Up to 6 cm / 2.4" • DESFire EV3: Up to 6 cm / 2.4" • Low Frequency: Up to 7 cm / 2.8" • ApplePay (10 cm / 3.93")
<b>Certifications</b>	FCC, CE, IC, RCM, UKCA, India (others pending)
<b>Environmental Protection</b>	IP65
<b>Mobile Operating Systems</b>	Apple iOS 11.0 or later; Android 4.4 or later on devices with the Safetrust Wallet
<b>Mobile Credential Emulations</b>	Most popular card formats including HID®, Indala®, AWID®, GE Casi®, Farpointe and Honeywell®, MIFARE® Classic, MIFARE® DESFire®, PIV, and FIDO2
<b>Bluetooth Range</b>	Touch to 100 ft (0 to 30 meters)
<b>Wi-Fi</b>	802.11b/g/n 5 GHz, IPv4, IPv6, 802.1x
<b>Encryption</b>	Hardware secure element EAL 6+, AES 256, ECC, TLS, x.509, OSDP v2 SC
<b>Relay</b>	Solid state relay
<b>Tamper</b>	Accelerometer
<b>Interoperability</b>	Natively interoperable with Safetrust sensor ecosystem (built on Bluetooth 5.0 mesh)
<b>Warranty</b>	Limited Lifetime

Safetrust, IoT Sensor, Credential Manager and Safetrust Wallet are all trademarks of Safetrust Inc. All other product and company names are trademarks of their respective holders; use of these trademarks does not imply any affiliation with or endorsement by their holders. All claims of compatibility are made by Safetrust only. \*HID®, iCLASS SE®, Seos®, multiCLASS SE®, and Indala® are trademarks of HID Global Corporation/ASSA ABLOY AB. Neither that company nor its affiliates have manufactured or endorsed this product and have no association to Safetrust Inc.

